

## DATA SHEET - HOLLOW SHAFT RESOLVER


PN	2367254-1							
Description:	V23401-		T2715-B101					
Size	21							
Shaft inner diameter [mm]	12.7							
Speed (pair of poles) [p]	2							
Number of poles	4							
Application Specification								
Test protocol	Results saved to manufacturing site archives. Available by request							
Electrical parameters (22°C)								
Input voltage [V]	7		Input resistance R1R2 [Ω]	35				
Frequency Typical [kHz]	10		R1R2 tolerance [%]	± 3.5				
Input current max [mA]	65		Output resistance S1S3 or S2S4 [Ω]	32				
Transformation ratio (rT)	0.5		S1S3 or S2S4 tolerance [%]	± 3.2				
Transf. ratio tolerance [%]	± 10	Based on specified						
Phase shift min [°]	-5 -	Input voltage and Frequency						
Phase shift max [º]	5							
Electrical Angular Error max [']	± 10							
Residual voltage max [mV]	25							
High Voltage test	Voltage: 500V <sub>AC</sub> (A)		Measured between:					
	250V <sub>AC</sub> (B)		A: Winding R1-R2 and housing					
	Time: 1s		Winding S1-S3 and housing					
		Winding S2-S4 and housing						
Isolation test		B: Windings \$1-\$3 and \$7-\$7						
	Criterium:	$R_{isol.} > 50M\Omega$						
"Zero" setting:	Electrical "0" is when Coils $V_{S2-S4} = 0$ and $V_{S1-S3}$ are in phase with $V_{R1-R2}$							
Transfer function	Looking at Transformation part and turning Rotor clockwise							
	$V_{S1-S3} = +rT * V_{R1-R2} * cos(p*\alpha)$							
	$V_{S2-S4}=+rT*V_{R1-R2}*sin(p*\alpha)$							
Rotor Inertia	approx. 20g.cm <sup>2</sup>							
Max. Rotational Speed	20,000 rpm							
Shock resistance	•							
(11ms sine)	1000 m/s <sup>2</sup>							
Vibration	200 m/s <sup>2</sup>							
Operating temp.	-55°C+150	)°C						

<sup>© 2019</sup> TE Connectivity family of companies

All Rights Reserved

<sup>|</sup> Indicates Change

<sup>\*</sup>Trademark. TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks. Other logos, product, and/or company names may be trademarks of their respective owners.

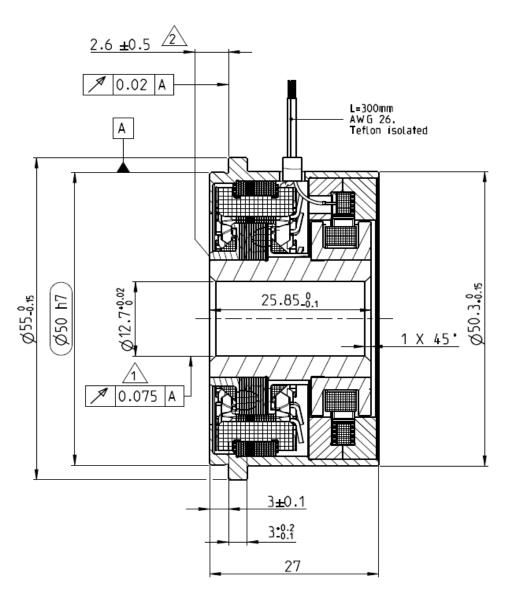

Gesamtschlag im eingebauten Zustand Concentricity in installed situation

Axialversatz
Axial displacement/offset

<u>DATE</u>	PN. REV.	<u>DWN</u>	<u>APP</u>	DS. REV.
10-06-20	1	H.Bernardo	D.Ondrej	1