

# Absolute encoders - SSI

End shaft  $\varnothing 12$  mm

Magnetic single- or multiturn encoders 12 bit ST / 13 bit MT

## BMSH 42, BMMH 42 SSI - MAGRES



BMMH 42 SSI with end shaft

### Features

- Mini encoder single- or multiturn / SSI
- Magnetic sensing
- Resolution: singleturn 12 bit, multiturn 13 bit
- Housing  $\varnothing 42$  mm
- High resistance to shock and vibrations
- Reset input
- End shaft  $\varnothing 12$  mm

### Technical data - electrical ratings

Voltage supply	5 VDC $\pm 10$ % 10...30 VDC
Consumption w/o load (typ.)	100 mA (5 VDC) 50 mA (24 VDC)
Initializing time (typ.)	170 ms after power on
Interface	SSI
Steps per turn	4096 / 12 bit
Absolute accuracy	$\pm 1^\circ$
Sensing method	Magnetic
Code	Gray or binary
Code sequence	CW: ascending values with clockwise sense of rotation (looking at flange)
Inputs	SSI clock Reset input
Output circuit	SSI data: linedriver RS485
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL approval / E217823
<b>BMSH 42</b>	
Function	Singleturn
<b>BMMH 42</b>	
Function	Multiturn
Number of turns	8192 / 13 bit

### Technical data - mechanical design

Dimensions (flange)	$\varnothing 42$ mm
Shaft	$\varnothing 12$ mm end shaft
Protection DIN EN 60529	IP 65
Operating speed	$\leq 12000$ rpm (mechanical) $\leq 6000$ rpm (electric)
Operating torque typ.	0.0093 Nm
Materials	Housing: steel Flange: aluminium
Operating temperature	-20...+85 °C
Relative humidity	95 %
Resistance	DIN EN 60068-2-6 Vibration 30 g, 10-2000 Hz DIN EN 60068-2-27 Shock 100 g, 6 ms
Connection	Connector M12, 8-pin Cable
<b>BMSH 42</b>	
Weight approx.	120 g
<b>BMMH 42</b>	
Weight approx.	190 g

# Absolute encoders - SSI

End shaft  $\varnothing 12$  mm

Magnetic single- or multiturn encoders 12 bit ST / 13 bit MT

## BMSH 42, BMMH 42 SSI - MAGRES

### Part number

#### Singleturn

BMSH 42S1   12/00

Connection  
5 Cable radial  
N Connector  
M12, 8-pin,  
radial

Shaft  
B2 End shaft  $\varnothing 12$  mm,  
IP 42, with clamping  
ring  
P2 End shaft  $\varnothing 12$  mm,  
IP 65, with clamping  
ring

Resolution  
12/00 12 bit singleturn

Voltage supply / signals  
05C 5 VDC / SSI  
24C 10...30 VDC / SSI

Code  
G Gray code  
N Binary code

#### Multiturn

BMMH 42S1   12/13

Connection  
5 Cable radial  
N Connector  
M12, 8-pin,  
radial


Shaft  
B2 End shaft  $\varnothing 12$  mm,  
IP 42, with clamping  
ring  
P2 End shaft  $\varnothing 12$  mm,  
IP 65, with clamping  
ring

Resolution  
12/13 12/13 bit single-/multiturn

Voltage supply / signals  
05C 5 VDC / SSI  
24C 10...30 VDC / SSI

Code  
G Gray code  
N Binary code

### Data transfer

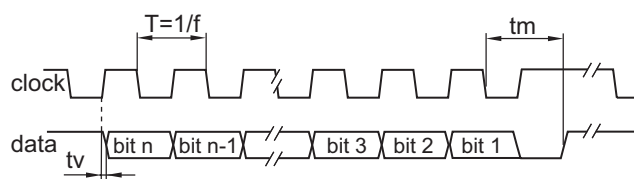

Clock frequency $f$	100...1000 kHz
Scan ratio of $T$	40...60 %
Time lag $t_v$	200 ns
Monoflop time $t_m$	$20 \mu\text{s} + T/2$

### Accessories

#### Connectors and cables

10146775	Female connector M12, 8-pin, straight
10127844	Female connector M12, 8-pin, straight, shielded, 2 m
10129332	Female connector M12, 8-pin, straight, shielded, 5 m cable

#### Mounting accessories

10110616	Clamp set
10138610	Set of spring coupling for BMSH, BMMH 42

# Absolute encoders - SSI

End shaft  $\varnothing 12$  mm

Magnetic single- or multturn encoders 12 bit ST / 13 bit MT

## BMSH 42, BMMH 42 SSI - MAGRES

Terminal significance	
+Vs	Encoder supply voltage.
0 V	Encoder ground connection relating to +Vs.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SSI clock input. Clock+ together with Clock- forms a current loop. A current of approx. 7 mA towards Clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with Clock+ forms a current loop. A current of approx. 7 mA towards Clock- input means logic 0 in positive logic.
Zero	Input for setting a zero point anywhere within the encoder resolution. The zero setting operation is triggered by a Low impulse. Connect to +Vs after setting operation for maximum interference immunity. Impulse duration >2 ms.
Rot. direction	Ascending position values when looking at the flange and rotating the shaft clockwise.

Terminal assignment		
<b>Cable</b> for connection reference -5		
Core colour	Signals	Description
brown	+Vs	Supply voltage
white	0 V	Supply voltage
grey	Data+	Data signal
pink	Data-	Data signal
green	Clock+	Clock signal
yellow	Clock-	Clock signal
blue	Zero	Zero setting input
red	d.u.	do not use
Screen	connected to housing	
Cable data	8 x 0,14 mm <sup>2</sup>	

Connector M12 male		
for connection reference -N		
Connector	Signals	Description
Pin 1	0 V	Supply voltage
Pin 2	+Vs	Supply voltage
Pin 3	Clock+	Clock signal
Pin 4	Clock-	Clock signal
Pin 5	Data+	Data signal
Pin 6	Data-	Data signal
Pin 7	Zero	Zero setting input
Pin 8	d.u.	do not use



Trigger level	
Control inputs	Input circuit
Input level Low	<0,4 V (>2 ms)
Input level High	+Vs or open

# Absolute encoders - SSI


End shaft  $\varnothing 12$  mm

Magnetic single- or multiturn encoders 12 bit ST / 13 bit MT


## BMSH 42, BMMH 42 SSI - MAGRES

### Dimensions


BMSH/BMMH 42 SSI cable axial

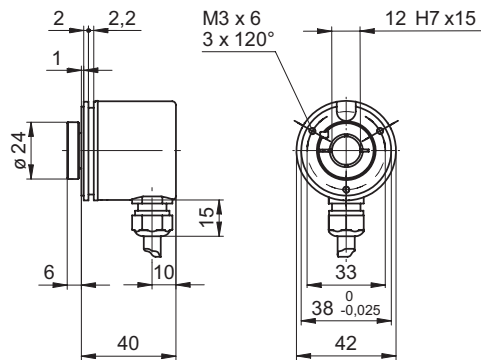

BMSH/BMMH 42 SSI cable radial

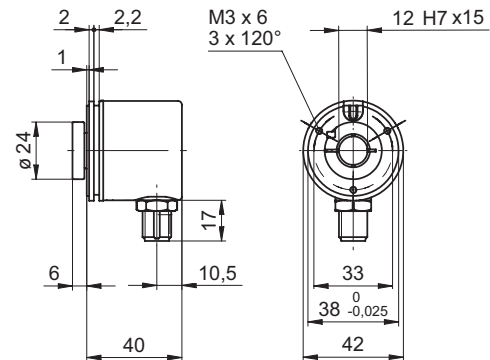

BMSH/BMMH 42 SSI connector output axial

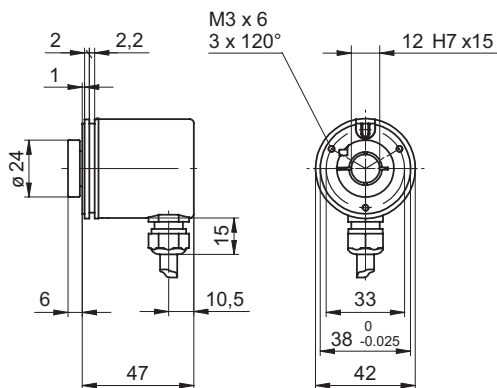

BMSH/BMMH 42 SSI connector output radial

