



Web Panels with TFT Display

User manual

User manual

Web Panels with TFT Display

UM EN WP 4XXXX, Revision 05

2021-03-26

This user manual is valid for:

Designation	Order No.
WP 4000	1065546
WP 4070W/P US 01	1094819
WP 4101W/P US 01	1094818
WP 4156W/P US 01	1104387
WP 4185W/P US 01	1104395
WP 4070-WXPS	1148693
WP 4070-WVRS	1148694
WP 4101-WXPS	1148687
WP 4120-WXPS	1148689
WP 4156-WHPS	1148691
WP 4185-WHPS	1148690
WP 4070-WVRS-2GB	1305215
WP 4070-WXPS-2GB	1305217
WP 4101-WXPS-2GB	1305220
WP 4120-WXPS-2GB	1305219
WP 4156-WHPS-2GB	1305218
WP 4185-WHPS-2GB	1305214

How to contact us

Internet

Up-to-date information on Phoenix Contact products and our Terms and Conditions can be found on the Internet at:

phoenixcontact.com

Make sure you always use the latest documentation.

It can be downloaded at:

phoenixcontact.net/products

Subsidiaries

If there are any problems that cannot be solved using the documentation, please contact your Phoenix Contact subsidiary.

Subsidiary contact information is available at phoenixcontact.com.

Published by

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstraße 8
32825 Blomberg
GERMANY

Should you have any suggestions or recommendations for improvement of the contents and layout of our manuals, please send your comments to

tecdoc@phoenixcontact.com

General terms and conditions of use for technical documentation

Phoenix Contact reserves the right to alter, correct, and/or improve the technical documentation and the products described in the technical documentation at its own discretion and without giving prior notice, insofar as this is reasonable for the user. The same applies to any technical changes that serve the purpose of technical progress.

The receipt of technical documentation (in particular user documentation) does not constitute any further duty on the part of Phoenix Contact to furnish information on modifications to products and/or technical documentation. You are responsible to verify the suitability and intended use of the products in your specific application, in particular with regard to observing the applicable standards and regulations. All information made available in the technical data is supplied without any accompanying guarantee, whether expressly mentioned, implied or tacitly assumed.

In general, the provisions of the current standard Terms and Conditions of Phoenix Contact apply exclusively, in particular as concerns any warranty liability.

This manual, including all illustrations contained herein, is copyright protected. Any changes to the contents or the publication of extracts of this document is prohibited.

Phoenix Contact reserves the right to register its own intellectual property rights for the product identifications of Phoenix Contact products that are used here. Registration of such intellectual property rights by third parties is prohibited.

Other product identifications may be afforded legal protection, even where they may not be indicated as such.

Table of Contents

1	Important Notes	7
	1.1 Symbols	7
	1.2 Safety Notes	7
	1.3 Security in the network	8
	1.4 Intended Use	8
	1.5 Target Group	9
	1.6 Licensing information on open source software	9
	1.7 Retrieving the source code	9
2	Installation and Commissioning	11
	2.1 Unpacking the Device	11
	2.2 Mounting the Device	12
	2.2.1 Front Panel Dimensions	13
	2.2.2 Mounting Cutout	19
	2.2.3 Side View, Mounting Depth	25
	2.3 Connecting the Device	31
	2.3.1 Supply Voltage	31
	2.3.2 Grounding	32
	2.4 Switching On	33
	2.5 Identification	33
3	Control and Display Elements	35
	3.1 Touchscreen	35
	3.2 Display	35
	3.3 Status LEDs	36
4	Interfaces of the Device	37
	4.1 Standard Interfaces	37
	4.1.1 Ethernet (X5)	38
	4.1.2 USB (X9, X10)	39
	4.1.3 Memory Card	40
5	Maintenance and Servicing	41
	5.1 Front Panel	41
	5.2 Fuse	41
6	Technical Data	43
	6.1 General	43

6.2	7" Display (resistive)	45
6.3	7" Display (PCAP)	47
6.4	10.1" Display (PCAP)	49
6.5	12.1" Display (PCAP)	51
6.6	15.6" Display (PCAP)	53
6.7	18.5" Display (PCAP)	55

1 Important Notes

1.1 Symbols

The symbols in this manual are used to draw your attention on notes and dangers.



This symbol indicates hazards that could lead to personal injury.

There are three signal words indicating the severity of a potential injury.

DANGER

Indicates a hazard with a high risk level. If this hazardous situation is not avoided, it will result in death or serious injury.

WARNING

Indicates a hazard with a medium risk level. If this hazardous situation is not avoided, it could result in death or serious injury.

CAUTION

Indicates a hazard with a low risk level. If this hazardous situation is not avoided, it could result in minor or moderate injury.



This symbol together with the **NOTE** signal word alerts the reader to a situation which may cause damage or malfunction to the device, hardware/software, or surrounding property.



Here you will find additional information or detailed sources of information.

1.2 Safety Notes

- Read this manual carefully before using the operating device. Keep this manual in a place where it is always accessible to all users.
- Proper transportation, handling and storage, placement and installation of this product are prerequisites for its subsequent flawless and safe operation.
- This user manual contains the most important information for the safe operation of the device.
- The user manual, in particular the safety notes, must be observed by all personnel working with the device.
- Observe the accident prevention rules and regulations that apply to the operating site.
- Installation and operation must only be carried out by qualified and trained personnel.

1.3 Security in the network

**NOTE: Risk of unauthorized network access**

Connecting devices to a network via Ethernet always entails the risk of unauthorized access to the network.

Therefore, please check your application for any option of deactivating active communication channels. Setting passwords to prevent third parties from accessing the controller without authorization and modifying the system.

Because of the controller's communication interfaces, we advise against using the controller in safety-critical applications without additional security appliances.

Please take additional protective measures according to the IT security requirements and the standards applicable to your application (for instance virtual networks (VPN) for remote maintenance access, firewalls, etc.) for protection against unauthorized network access.

On first request, you shall release Phoenix Contact and the companies associated with Phoenix Contact GmbH & Co. KG, Flachsmarktstraße 8, 32825 Blomberg in accordance with §§ 15 ff. AktG or German Stock Corporation Act (hereinafter collectively referred to as "Phoenix Contact") from all third-party claims that are made due to improper use.

For the protection of networks for remote maintenance via VPN, Phoenix Contact offers the mGuard product series security appliances which you can find described in the latest Phoenix Contact catalog (phoenixcontact.net/products).

Additional measures for protection from unauthorized network access can be found in the AH EN INDUSTRIAL SECURITY application note. The application note can be downloaded at phoenixcontact.net/products.

1.4 Intended Use

- The device is designed for use in the industry.
- The device is state-of-the art and has been built to the latest standard safety requirements. However, dangerous situations or damage to the machine itself or other property can arise from the use of this device.
- The device fulfills the requirements of the EMC directives and harmonized European standards. Any modifications to the system can influence the EMC behavior.

**NOTICE: Radio Interference**

Operation of this device may cause radio interference in residential areas.

1.5 Target Group

The use of products described in this manual is oriented exclusively to:

- Qualified electricians or persons instructed by them. The users must be familiar with the relevant safety concepts of automation technology as well as applicable standards and other regulations.
- Qualified application programmers and software engineers. The users must be familiar with the relevant safety concepts of automation technology as well as applicable standards and other regulations.

1.6 Licensing information on open source software

The operating device works with a Linux operating system. License information for the individual Linux packages can be found in the web-based management of the operating device.

1.7 Retrieving the source code

This product contains software components which are licensed by the rights holder as free software or Open-source software under the GNU General Public License, version 2. You may retrieve the source code for these software components from Phoenix Contact using an appropriate storage medium (CD or DVD-ROM), by contacting After Sales Service at the address below. This must be carried out no more than three years after delivery of the product. A processing charge of 50 euros will be required in this case.

PHOENIX CONTACT GmbH & Co. KG
After Sales Service
Flachsmarktstraße 8
32825 Blomberg
GERMANY

Subject: Source code WP 4XXXX

2 Installation and Commissioning

2.1 Unpacking the Device

Unpack all parts carefully and check the contents for any visible damage in transit. Also check whether the shipment matches the specifications on your delivery note.

If you notice damages in transit or discrepancies, please contact us immediately.

2.2 Mounting the Device


NOTICE: Damage

When installing the device, leave a gap of at least 30 mm (1.181") around the device to ensure sufficient air circulation.


NOTICE: Damage

When the operating device is installed horizontally, please note that additional sources of heat beneath the operating device may result in heat accumulation.

Make sure to allow sufficient heat dissipation!

Please observe the permissible temperature range specified in the technical data when operating the device.


NOTICE: Damage

In order to ensure the degree of protection specified in the technical data, observe the following points:

- A tolerance of ± 0.5 mm is maintained for the mounting cutout.
- The seal lies flat against the mounting surface.
- The number of mounting brackets, given in the technical data, is used.
- The material of the mounting surface is sufficiently stable to ensure permanently secure attachment of the operating device.
- The mounting surface and the operating device may not become deformed due to the effects of the mounting clamps or through the operation of the device.
- The threaded pins of the mounting brackets are tightened uniformly to a maximum torque of 1 Nm.

The device can be easily and quickly mounted from the rear of the device. A panel thickness of 1 mm to 6 mm (0.039" to 0.236") is permitted for proper mounting.

1. Cut the mounting cutout in the housing for the device size to be installed.
2. Push the device through the mounting cutout from the front.

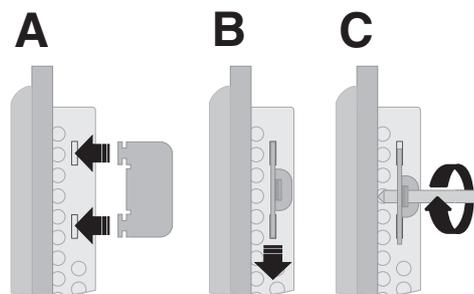


Figure 2-1 Mounting the device using a mounting bracket

3. Fix the mounting brackets in the recesses provided (A).
4. Pull the mounting brackets down until the snap into place (B).
5. Secure the device using the threaded pins (C).

2.2.1 Front Panel Dimensions

2.2.1.1 7" Display (resistive)

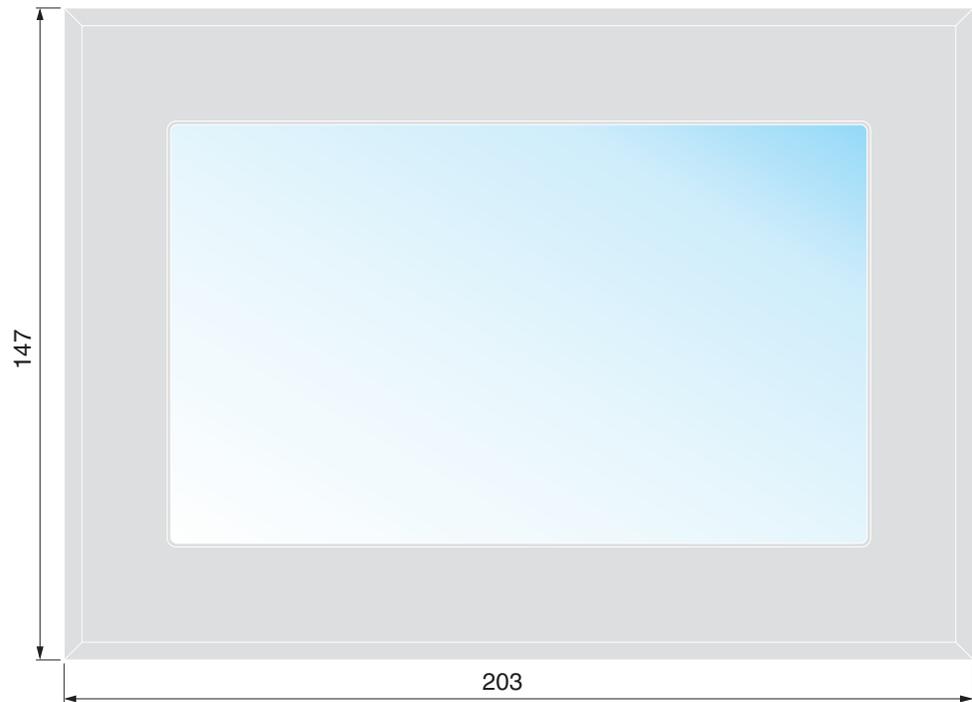


Figure 2-2 Front panel (dimensions in mm)

2.2.1.2 7" Display (PCAP)



Figure 2-3 Front panel (dimensions in mm)

2.2.1.3 10.1" Display (PCAP)

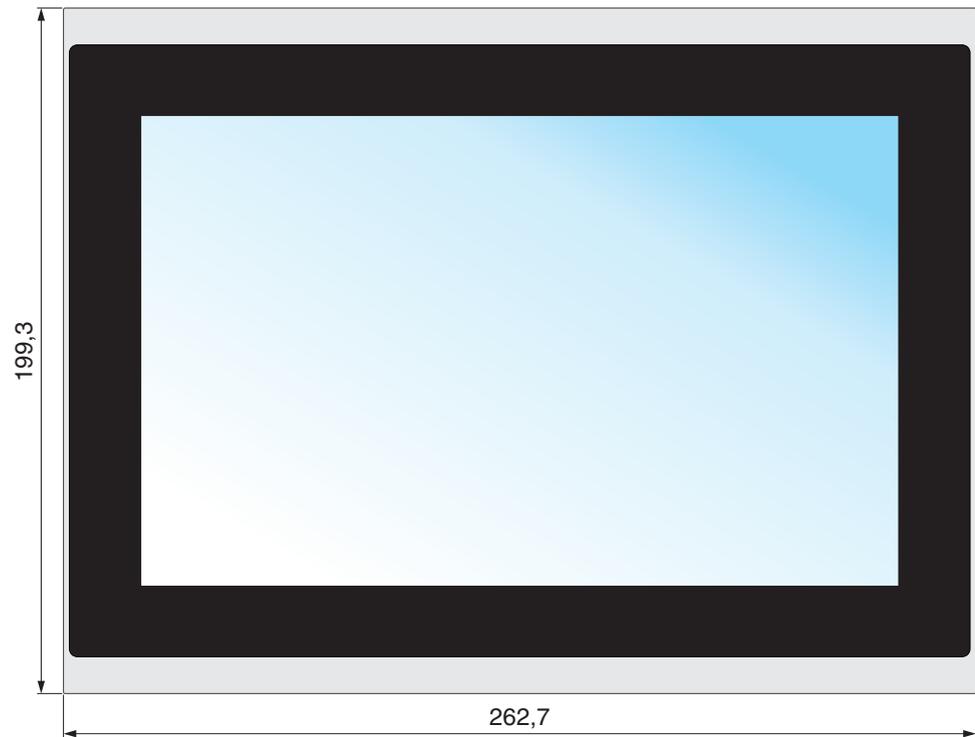


Figure 2-4 Front panel (dimensions in mm)

2.2.1.4 12.1" Display (PCAP)



Figure 2-5 Front panel (dimensions in mm)

2.2.1.5 15.6" Display (PCAP)



Figure 2-6 Front panel (dimensions in mm)

2.2.1.6 18.5" Display (PCAP)



Figure 2-7 Front panel (dimensions in mm)

2.2.2 Mounting Cutout

2.2.2.1 7" Display (resistive)

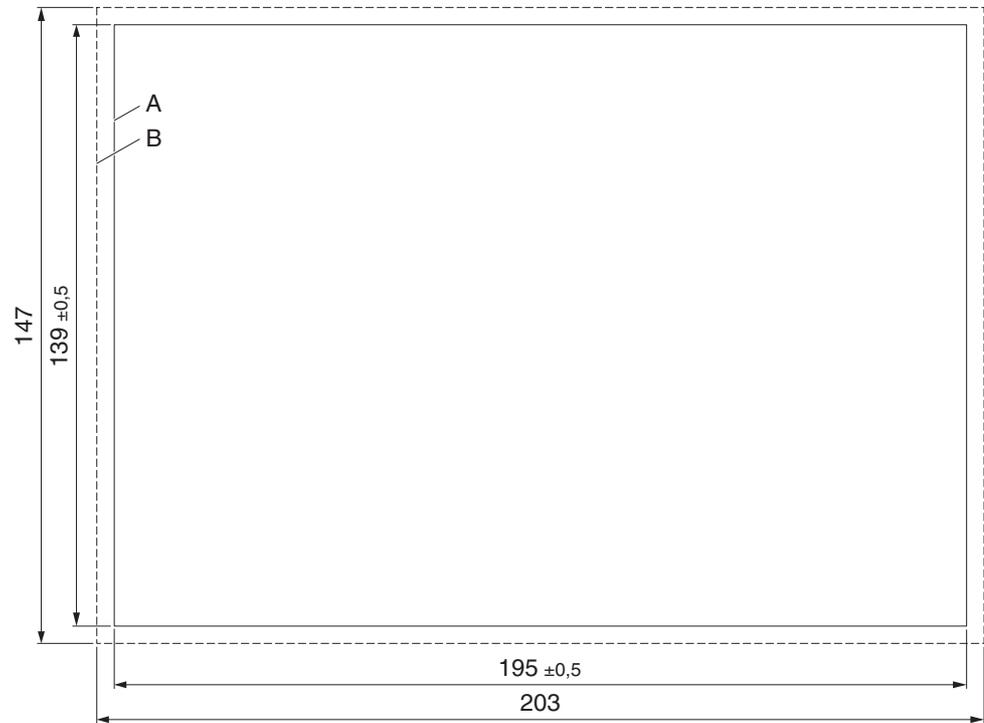


Figure 2-8 Mounting cutout (dimensions in mm)

- A** Mounting Cutout
- B** Front Panel

2.2.2.2 7" Display (PCAP)

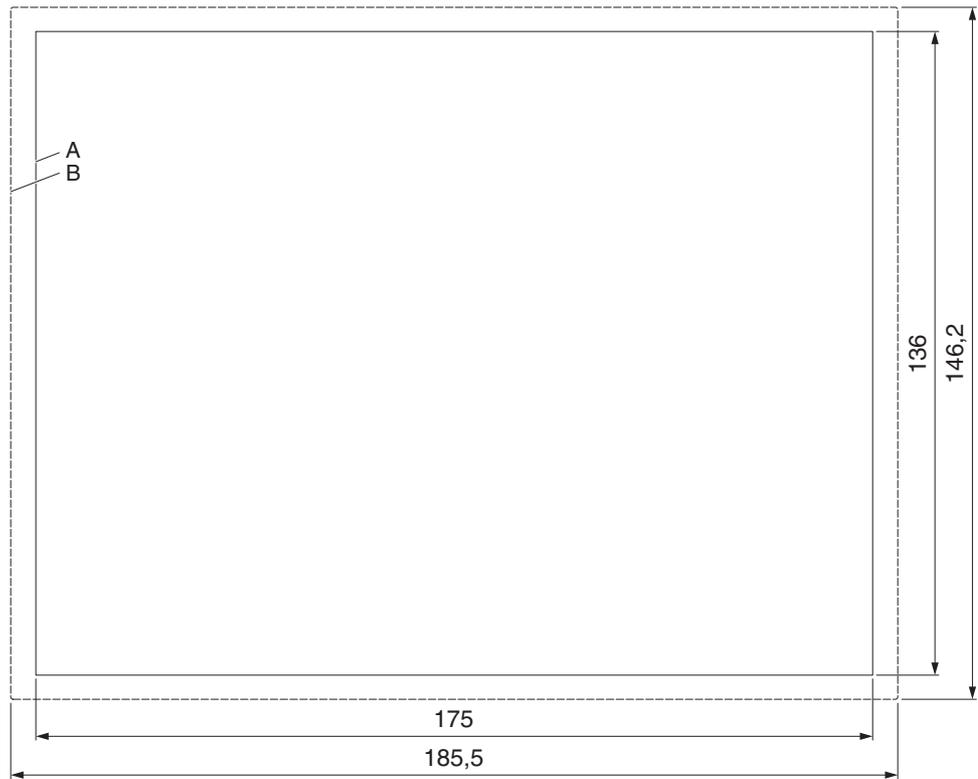


Figure 2-9 Mounting cutout (dimensions in mm)

- A Mounting Cutout
- B Front Panel

2.2.2.3 10.1" Display (PCAP)

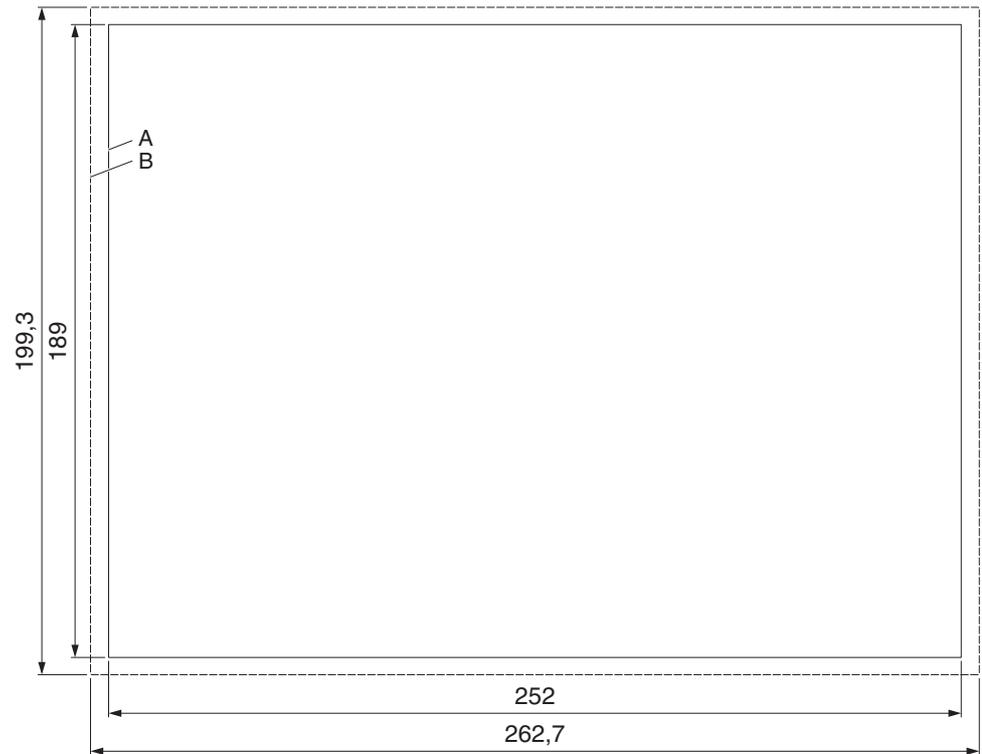


Figure 2-10 Mounting cutout (dimensions in mm)

- A Mounting Cutout
- B Front Panel

2.2.2.4 12.1" Display (PCAP)

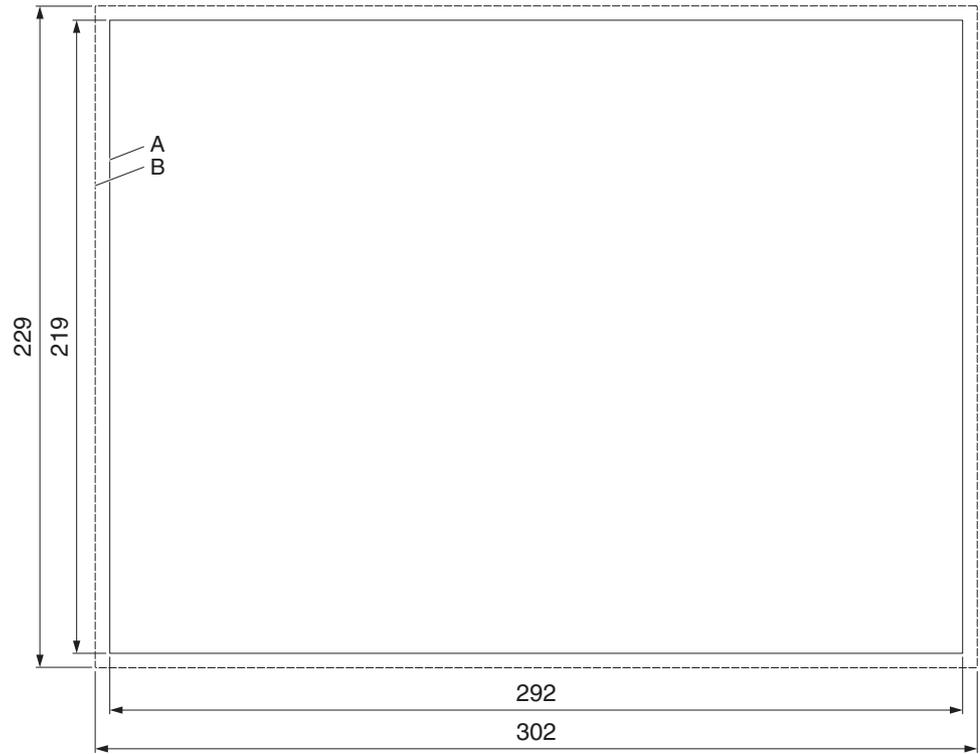


Figure 2-11 Mounting cutout (dimensions in mm)

- A Mounting Cutout
- B Front Panel

2.2.2.5 15.6" Display (PCAP)

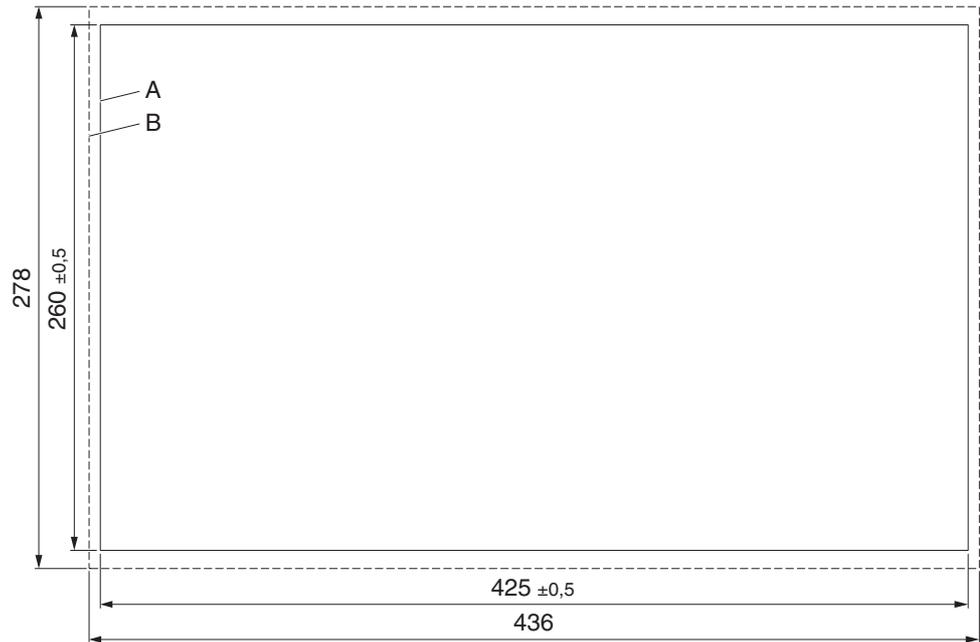


Figure 2-12 Mounting cutout (dimensions in mm)

- A** Mounting Cutout
- B** Front Panel

2.2.2.6 18.5" Display (PCAP)

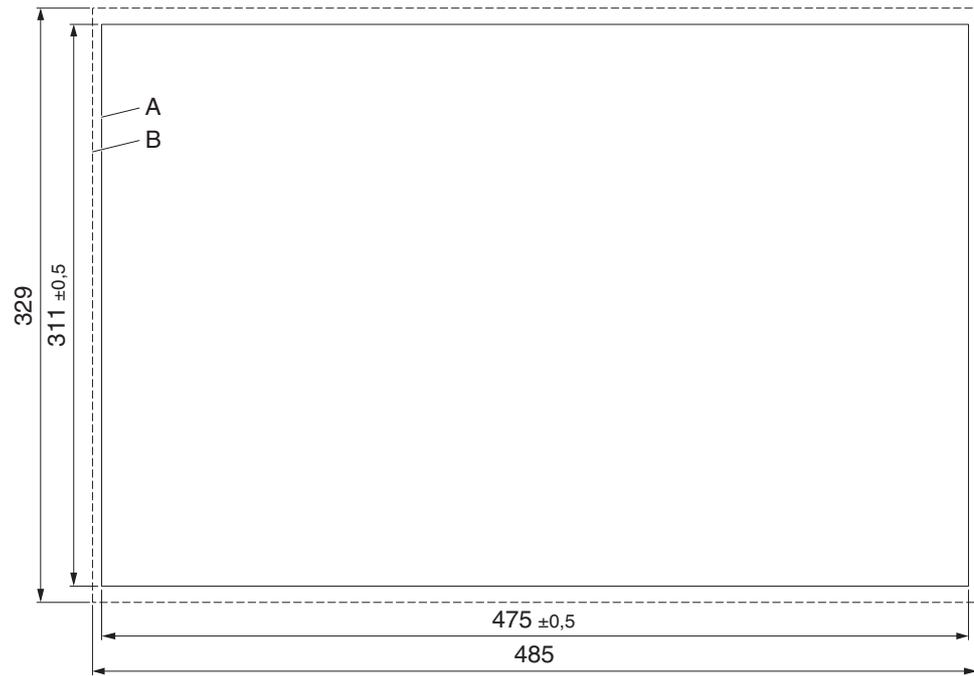


Figure 2-13 Mounting cutout (dimensions in mm)

- A Mounting Cutout
- B Front Panel

2.2.3 Side View, Mounting Depth

2.2.3.1 7" Display (resistive)

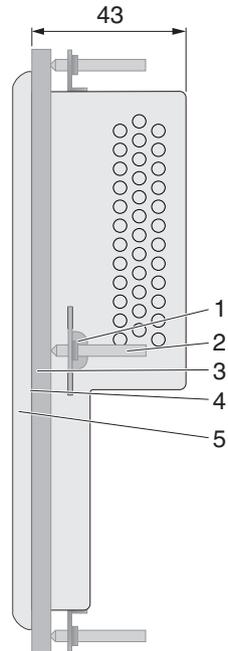


Figure 2-14 Side view, mounting depth (dimensions in mm)

- 1 Mounting Bracket
- 2 Threaded Pin
- 3 Mounting Surface Thickness 1 mm to 6 mm
- 4 Circumferential Seal
- 5 Front Panel

2.2.3.2 7" Display (PCAP)

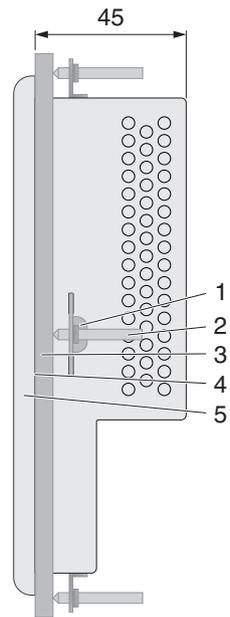


Figure 2-15 Side view, mounting depth (dimensions in mm)

- 1 Mounting Bracket
- 2 Threaded Pin
- 3 Mounting Surface Thickness 1 mm to 6 mm
- 4 Circumferential Seal
- 5 Front Panel

2.2.3.3 10.1" Display (PCAP)

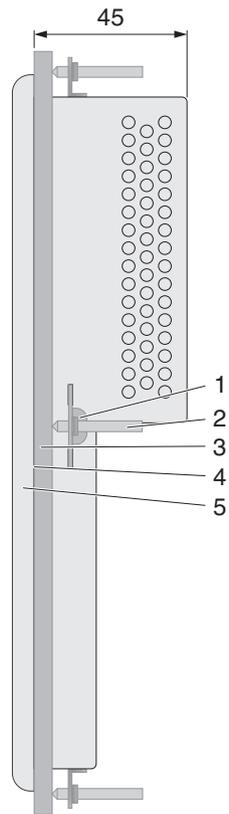


Figure 2-16 Side view, mounting depth (dimensions in mm)

- 1 Mounting Bracket
- 2 Threaded Pin
- 3 Mounting Surface Thickness 1 mm to 6 mm
- 4 Circumferential Seal
- 5 Front Panel

2.2.3.4 12.1" Display (PCAP)

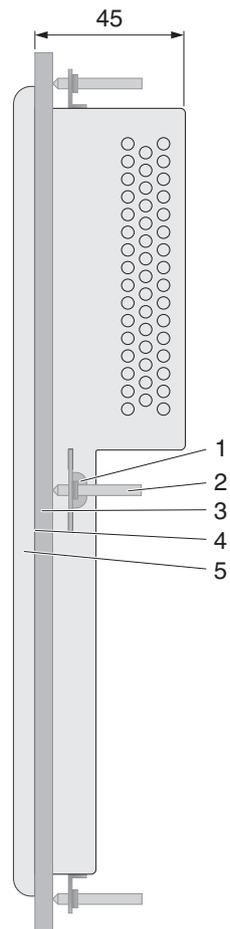


Figure 2-17 Side view, mounting depth (dimensions in mm)

- 1 Mounting Bracket
- 2 Threaded Pin
- 3 Mounting Surface Thickness 1 mm to 6 mm
- 4 Circumferential Seal
- 5 Front Panel

2.2.3.5 15.6" Display (PCAP)

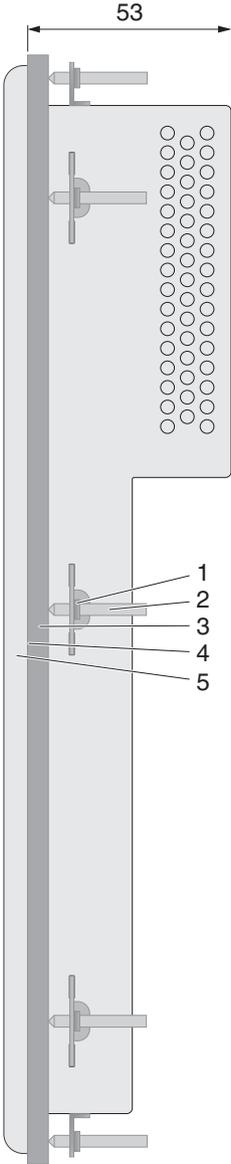


Figure 2-18 Side view, mounting depth (dimensions in mm)

- 1 Mounting Bracket
- 2 Threaded Pin
- 3 Mounting Surface Thickness 1 mm to 6 mm
- 4 Circumferential Seal
- 5 Front Panel

2.2.3.6 18.5" Display (PCAP)

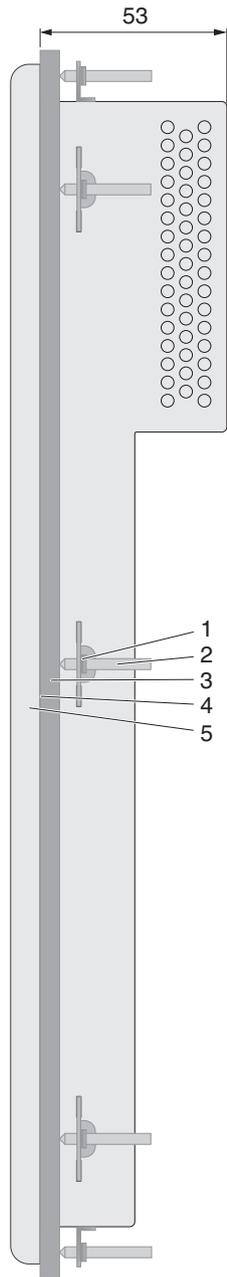


Figure 2-19 Side view, mounting depth (dimensions in mm)

- 1 Mounting Bracket
- 2 Threaded Pin
- 3 Mounting Surface Thickness 1 mm to 6 mm
- 4 Circumferential Seal
- 5 Front Panel

2.3 Connecting the Device

2.3.1 Supply Voltage

The supply voltage is supplied via pin strip X1. A suitable socket strip is supplied.

Refer to the technical data for the permissible supply voltage of the operating device.



NOTICE: Damage

The operating device has to be supplied by a power source, which meets the requirements for SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1.



NOTICE: Damage

For UL 61010, an 4 A (or smaller) fuse, either standard or electronic, or circuit breaker must be installed between the 24 V DC external power supply and the operating device. The fuse / circuit breaker must be rated at 30 V DC and be a UL listed component.



The device has reverse polarity protection. In case of wrong polarity, the device will not operate.

Connector in the operating device: 3 pin pin strip

Table 2-1 Pin assignment supply voltage

Pin	Designation	Function
1		Functional earth ground (FE)
2	0 V	Supply voltage 0 V (GND)
3		Supply voltage 24 V



DANGER: Hazardous voltages

Hazardous voltages can exist inside electrical installations that can pose a danger to humans. Coming in contact with live parts may result in electric shock!



NOTICE: Damage

Cables with finely stranded copper conductors with a minimum cross-section of 0.75 mm² (18 AWG) and a maximum cross-section of 2.5 mm² (14 AWG) must be used for the supply voltage.

You must adhere to the following torques at the connector:

Screw connection of terminal blocks: 0.22 Nm (minimal) to 0.25 Nm (maximum)

Screw flange: 0.3 Nm (maximum)

Use the following procedure to connect the device to the supply voltage:

1. Strip approx. 30 mm (1.181") off the outer cable sheath and approx. 5 mm (0.197") off the wires.

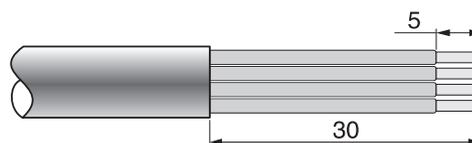


Figure 2-20 Preparing the cable

2. Fit the wires with wire end ferrules and connect the wires to the socket strip.
3. Plug the socket strip onto pin strip X1.
4. Secure the socket strip in place with a screw-type locking to prevent it from slipping out.

2.3.2 Grounding

The grounding is performed with a slip-on sleeve (noiseless ground / functional earth ground).



NOTICE: Damage

A separate copper conductor must always be provided for the grounding. The conductor must have a minimum cross-section of 1.5 mm² (16 AWG) and must be kept as short as possible.

1. Strip approx. 5 mm (0.197") off the wires.
2. Fit the stripped wires with a slip-on sleeve.
3. Plug the slip-on sleeve on the flat tab.




Figure 2-21 Noiseless ground

2.4 Switching On

When switching on the operating system loads. The interface for microSDHC cards is available for applications and other data.



Please also pay attention to the further information in the user manual of your software option at phoenixcontact.net/products.

2.5 Identification

The operating device can be identified using the nameplate on the rear of the device.



Figure 2-22 Nameplate (example)

- 1 Article number, device type
- 2 Software version (at time of delivery)
- 3 MAC-Adress
- 4 Voltage and power specification
- 5 Serial number

3 Control and Display Elements

3.1 Touchscreen

The device is equipped with a touch screen. You operate the device using this touch screen.

Note the following for devices equipped with a resistive 4-wire touch screen:

**NOTICE: Damage**

Pointed or sharp objects, such as pens or fingernails, can lead to irreparable damages of the touch screen. Exclusively therefore use the fingertips or the aids indicated in the technical data for the operation.

3.2 Display

**DANGER: Toxic**

If the display is damaged, avoid touching, swallowing or breathing in the liquids or gases which may leak out!

**DANGER: Corrosive**

If the display is damaged, avoid touching, swallowing or breathing in the liquids or gases which may leak out!



Pixel failures, which can occur with TFT displays, are due to production and no complaint reason!

The operating device is equipped with different displays (see technical data) depending on variant.

3.3 Status LEDs

Next to the slot for the microSD / microSDHC memory card there are status LEDs.




Figure 3-1 Position of the status LEDs

The status LEDs have the following functions:

Table 3-1 Status LEDs

LED	Color	State	Designation	Function
1	Green	Flashing	Heartbeat	The bootloader and the image has been started
		Off		The operating device could not be started properly
2	Green	On	Power	Supply voltage available
		Off		Supply voltage not available

4 Interfaces of the Device

4.1 Standard Interfaces

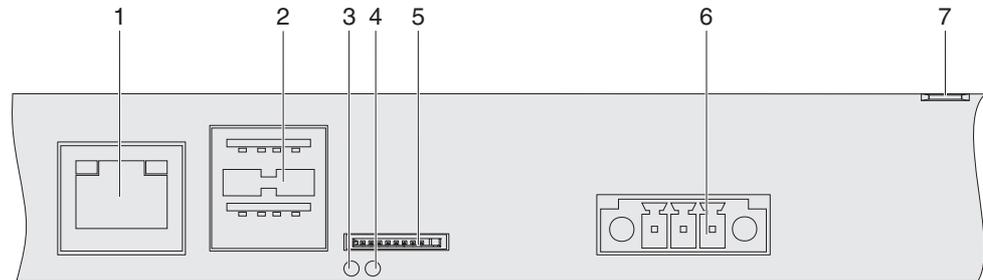


Figure 4-1 Rear view Ethernet

- 1 Female Connector X5 (Ethernet)
- 2 Female Connector X9, X10 (USB Host - Type A)
- 3 Status LED LD1 (Heartbeat)
- 4 Status LED LD2 (Power)
- 5 Slot for microSD- / microSDHC Memory Card
- 6 Connector X1 (Supply Voltage)
- 7 Flat Push-on Connection for Noiseless Grounding

4.1.1 Ethernet (X5)

A 10/100Base-T Ethernet interface is located at the operating device.

4.1.1.1 Pin Assignment

Connector in the operating device: RJ45 female connector.

Table 4-1 Assignment of the Ethernet interface

Pin	Designation	Function
1	Tx+	Transmitted Data, Positive Polarity
2	Tx-	Transmitted Data, Negative Polarity
3	Rx+	Received Data, Positive Polarity
4	n.c.	Not Connected
5	n.c.	Not Connected
6	Rx-	Received Data, Negative Polarity
7	n.c.	Not Connected
8	n.c.	Not Connected

4.1.1.2 Cable



NOTICE

Use a twisted pair cable of category 5 (CAT 5). The maximum cable length is 100 m (328.084 feet).



See the IEEE 802.3 standard for further information.

4.1.1.3 Diagnostics

Ethernet diagnostics LEDs are located at the operating device.




Figure 4-2 Position of the ethernet diagnostics LEDs

Table 4-2 Ethernet diagnostics LEDs

LED	Color	State	Designation	Function
1	Green	On	ACT/LNK	Connected
		Flashing		Sending / receiving ethernet data telegram
2	Yellow	On	SPD 10/100	Operation in 100 MBit/s mode
		Off		Operation in 10 MBit/s mode or disconnected

4.1.2 USB (X9, X10)

Two host interfaces are available on the operating device.



NOTICE:

Using hardware not suitable for industrial use (for example keyboard, mouse, memory card) in industrial environments may decrease safety of operation. This includes hardware intended for home and office use.

4.1.2.1 Cable



For the specification of a suitable cable, please refer to the „Universal Serial Bus Specification“.



NOTICE:

Use industrial-suited USB cables with a length of maximally 2.5 m (8.202 feet).

4.1.3 Memory Card

At the underside of the operating device you can plug in an microSD / microSDHC card.

**NOTICE:**

Using hardware not suitable for industrial use (for example keyboard, mouse, memory card) in industrial environments may decrease safety of operation. This includes hardware intended for home and office use.

4.1.3.1 Inserting the memory card

When you insert the memory card, make sure the front side (side with contacts is below) of the memory card is visible. Insert the memory card until it snaps into place.

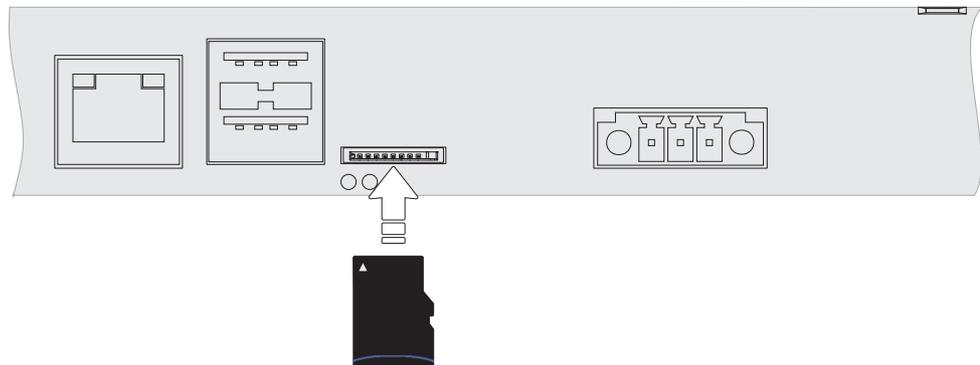


Figure 4-3 Inserting the memory card

4.1.3.2 Ejecting the memory card

To remove, push the memory card into the operating device until it clicks. The memory card bounces when released automatically out of the operating device. Now you can remove the memory card.

5 Maintenance and Servicing

5.1 Front Panel

Use a damp cloth to remove any dirt from the front panel. You also can use Isopropanol for stronger pollutions.

5.2 Fuse

**NOTICE: Damage**

The electronic fuse cannot be replaced!

A electronic fuse (eFuse) is used to protect the device. Once the fuse has been tripped, the device must be disconnected from the supply voltage to allow the electronic fuse to regenerate. At an ambient temperature of 20 °C (68 °F), the regeneration takes approximately 20 seconds. The higher the ambient temperature, the longer the regeneration takes.

6 Technical Data

6.1 General

Ethernet

X5 Ethernet 10/100Base-T

USB

Corresponds to the „Universal serial bus specification Rev. 2.0“

X9, X10 Host	Min.: 1.5 Mbit/s Max.: 12 Mbit/s Max. output current 100 mA per output
--------------	--

Beeper

Sound pressure level	At most 85 db at a distance of 10 (3.937") cm without shielding. The sound pressure level of the mounted operating device is dependent on the shielding at the mounting place.
----------------------	---

Central Processing Unit

Central processing unit	ARM Cortex™-A53
Clock frequency	1,2 GHz quad-core
Other features	Real-time clock (typical deviation is approx. 2 minutes per month)

Real-time Clock

The real-time clock is buffered with a capacitor.
The capacitor reaches its maximum capacity after approximately 30 minutes of continuous charging.
After a maximum charge, the real-time clock can be buffered approximately 10 days.

Memory

RAM	1 GByte / 2 GByte LPDDR3
Mass storage	8 GByte eMMC
microSD/microSDHC interface	2 GByte / 32 GByte maximum

Connection System

Male connector strip Phoenix MINI-COMBICON, 3 pin (Art.-No. 1847068)

RJ45 male connector

USB male connector type A

Standards and Guidelines

Interference immunity	EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-6-2
Emitted interference	EN 55011 limit value class A EN 55032 limit value class A EN 61000-6-4
Equipment requirements	EN 61131-2
Storage and transportation	EN 61131-2
Power supply	EN 61131-2
Electromagnetic compatibility	2014/30/EU
Degrees of protection	EN 60529
Impact load, shocks	EN 60068-2-27
Sinusoidal vibrations	EN 60068-2-6



NOTICE: Radio Interference

Operation of this device may cause radio interference in residential areas.

6.2 7" Display (resistive)

Touch Screen

Type	Analog resistive, 4 wire technology
Activation force	15 g (Standard) With R8 HS60 silicon rubber
Durability	No damages or malfunctions after 3 million keystrokes as the following: Keystroke element: R8, HS40 silicon rubber Keystroke load: 150 g Keystroke frequency: 3 Hz

Display

Size (diagonal) in cm (inch)	17.78 (7)
Type	TFT (color)
Resolution (pixels)	800 x 480
Colors	262144
Viewing angle (left / right / up / down) in °	70 / 70 / 65 / 65
Half-life backlighting	40,000 h
Brightness in cd/m ²	350
Display area (H x W) in mm (Inch)	91.4 x 152.4 (3.598 x 6.0)

Environmental Conditions

Temperature during operation	0 °C to 50 °C (32 °F to 122 °F) - (with order key option P29 / P31)
Temperature during storage, transport	- 25 °C to + 70 °C (- 13°F to + 158 °F)
Relative air humidity for operation and storage	20 % to 85 %, no condensation
Application area	Degree of pollution 2, overvoltage category II No direct solar radiation

Electrical Data

Supply voltage	24 V DC (SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1)
Residual ripple	10 % maximum
Minimum voltage	18 V
Maximum voltage	30 V
Power consumption (typical at 24 V)	0.4 A
Inrush current	< 10 x nominal current
Connected load	9.6 W
Fuse	Electronic fuse, self-resetting
Protection against polarity reversal	Integrated

Front Panel and Enclosure

Enclosure	Steel sheet, galvanized
Front panel material	Aluminium, brushed, anodized natural finish
Front panel (H x W x D) in mm (Inch)	147 x 203 x 5 (5.787 x 7.992 x 0.197)
Seal	Circumferential rubber seal on the rear
Mounting cutout (H x W) in mm (Inch)	139 x 195 (5.7472 x 7.677)
Mounting brackets	6
Mounting depth in mm (Inch)	About 43 mm (1.692)
Degree of protection	Front: IP65 / NEMA Enclosure Type 1 (indoor use only) Rear: IP20
Total weight	About 750 g

Approvals

CE approval	CE
UL approval	UL / cUL

6.3 7" Display (PCAP)

Touch Screen

Type	Projected capacitive
Operation	With the finger

Display

Size (diagonal) in cm (inch)	17.78 (7)
Type	TFT (color)
Resolution (pixels)	1280 x 800
Colors	16.77 million
Viewing angle (left / right / up / down) in °	85 / 85 / 85 / 85
Half-life backlighting	50,000 h
Brightness in cd/m ²	500
Display area (H x W) in mm (Inch)	91.4 x 152.4 (3.598 x 6.0)

Environmental Conditions

Temperature during operation	0 °C to 50 °C (32 °F to 122 °F) - (with order key option P29 / P31)
Temperature during storage, transport	- 20 °C to + 60 °C (- 4 °F to 140 °F)
Relative air humidity for operation and storage	Front: 5 % to 95 %, no condensation Rear: 20 % to 85 %, no condensation
Application area	Degree of pollution 2, overvoltage category II No direct solar radiation

Electrical Data

Supply voltage	24 V DC (SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1)
Residual ripple	10 % maximum
Minimum voltage	18 V
Maximum voltage	30 V
Power consumption (typical at 24 V)	0.4 A
Inrush current	< 10 x nominal current
Connected load	9.6 W
Fuse	Electronic fuse, self-resetting
Protection against polarity reversal	Integrated

Front Panel and Enclosure

Enclosure	Steel sheet, galvanized
Front panel material	Aluminium, brushed, anodized natural finish
Front panel (H x W x D) in mm (Inch)	146.2 x 185.5 x 6 (5.755 x 7.303 x 0.236)
Seal	Flat gasket on the rear

WP 4000

Front Panel and Enclosure

Mounting cutout (H x W) in mm (Inch)	136 x 175 (5.354 x 6.889)
Mounting brackets	6
Mounting depth in mm (Inch)	About 45 (1.771)
Degree of protection	Front: IP65 / NEMA Enclosure Type 4 (indoor use only) Rear: IP20
Total weight	About 760 g

Approvals

CE approval	CE
UL approval	UL / cUL

6.4 10.1" Display (PCAP)

Touch Screen

Type	Projected capacitive
Operation	With the finger

Display

Size (diagonal) in cm (inch)	25.65 (10.1)
Type	TFT (color)
Resolution (pixels)	1280 x 800
Colors	16.77 million
Viewing angle (left / right / up / down) in °	85 / 85 / 85 / 85
Half-life backlighting	50,000 h
Brightness in cd/m ²	850
Display area (H x W) in mm (Inch)	217 x 136 (8.543 x 5.354)

Environmental Conditions

Temperature during operation	0 °C to 50 °C (32 °F to 122 °F) - (with order key option P29 / P31)
Temperature during storage, transport	- 20 °C to + 60 °C (- 4 °F to 140 °F)
Relative air humidity for operation and storage	Front: 5 % to 95 %, no condensation Rear: 20 % to 85 %, no condensation
Application area	Degree of pollution 2, overvoltage category II No direct solar radiation

Electrical Data

Supply voltage	24 V DC (SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1)
Residual ripple	10 % maximum
Minimum voltage	18 V
Maximum voltage	30 V
Power consumption (typical at 24 V)	0.6 A
Inrush current	< 10 x nominal current
Connected load	14.4 W
Fuse	Electronic fuse, self-resetting
Protection against polarity reversal	Integrated

Front Panel and Enclosure

Enclosure	Steel sheet, galvanized
Front panel material	Aluminium, brushed, anodized natural finish
Front panel (H x W x D) in mm (Inch)	199.3 x 262.7 x 6 (7.846 x 10.342 x 0.236)
Seal	Flat gasket on the rear

WP 4000

Front Panel and Enclosure

Mounting cutout (H x W) in mm (Inch)	189 x 252 (7.44 x 9.921)
Mounting brackets	6
Mounting depth in mm (Inch)	About 45 (1.771)
Degree of protection	Front: IP65 / NEMA Enclosure Type 4 (indoor use only) Rear: IP20
Total weight	About 1270 g

Approvals

CE approval	CE
UL approval	UL / cUL

6.5 12.1" Display (PCAP)

Touch Screen

Type	Projected capacitive
Operation	With the finger

Display

Size (diagonal) in cm (inch)	30.73 (12.1)
Type	TFT (color)
Resolution (pixels)	1280 x 800
Colors	16.77 million
Viewing angle (left / right / up / down) in °	85 / 85 / 85 / 85
Half-life backlighting	50,000 h
Brightness in cd/m ²	380
Display area (H x W) in mm (Inch)	163.2 x 261.1 (6.425 x 10.28)

Environmental Conditions

Temperature during operation	0 °C to 50 °C (32 °F to 122 °F) - (with order key option P29 / P31)
Temperature during storage, transport	- 20 °C to + 60 °C (- 4 °F to 140 °F)
Relative air humidity for operation and storage	Front: 5 % to 95 %, no condensation Rear: 20 % to 85 %, no condensation
Application area	Degree of pollution 2, overvoltage category II No direct solar radiation

Electrical Data

Supply voltage	24 V DC (SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1)
Residual ripple	10 % maximum
Minimum voltage	18 V
Maximum voltage	30 V
Power consumption (typical at 24 V)	0.7 A
Inrush current	< 10 x nominal current
Connected load	16.8 W
Fuse	Electronic fuse, self-resetting
Protection against polarity reversal	Integrated

Front Panel and Enclosure

Enclosure	Steel sheet, galvanized
Front panel material	Aluminium, brushed, anodized natural finish
Front panel (H x W x D) in mm (Inch)	229 x 302 x 6 (9.015 x 11.889 x 0.236)
Seal	Flat gasket on the rear

WP 4000

Front Panel and Enclosure

Mounting cutout (H x W) in mm (Inch)	219 x 292 (8.622 x 11.496)
Mounting brackets	8
Mounting depth in mm (Inch)	About 45 (1.771)
Degree of protection	Front: IP65 / NEMA Enclosure Type 4 (indoor use only) Rear: IP20
Total weight	About 1650 g

Approvals

CE approval	CE
UL approval	UL / cUL

6.6 15.6" Display (PCAP)

Touch Screen

Type	Projected capacitive
Operation	With the finger

Display

Size (diagonal) in cm (inch)	39.6 (15.6)
Type	TFT (color)
Resolution (pixels)	1366 x 768
Colors	16.77 million
Viewing angle (left / right / up / down) in °	80 / 80 / 80 / 80
Half-life backlighting	70.000 h
Brightness in cd/m ²	320
Display area (H x W) in mm (Inch)	194 x 344 (7.637 x 13.543)

Environmental Conditions

Temperature during operation	0 °C to 50 °C (32 °F to 122 °F) - (with order key option P29 / P31)
Temperature during storage, transport	- 25 °C bis + 70 °C (- 13°F to + 158 °F)
Relative air humidity for operation and storage	Front: 5 % to 95 %, no condensation Rear: 20 % to 85 %, no condensation
Application area	Degree of pollution 2, overvoltage category II No direct solar radiation

Electrical Data

Supply voltage	24 V DC (SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1)
Residual ripple	10 % maximum
Minimum voltage	18 V
Maximum voltage	30 V
Power consumption (typical at 24 V)	1 A
Inrush current	< 10 x nominal current
Connected load	24 W
Fuse	Electronic fuse, self-resetting
Protection against polarity reversal	Integrated

Front Panel and Enclosure

Enclosure	Steel sheet, galvanized
Front panel material	Aluminium, brushed, anodized natural finish
Front panel (H x W x D) in mm (Inch)	278 x 436 x 6 (10.944 x 17.165 x 0.236)
Seal	Flat gasket on the rear

WP 4000

Front Panel and Enclosure

Mounting cutout (H x W) in mm (Inch)	260 x 425 (10.236 x 16.732)
Mounting brackets	12
Mounting depth in mm (Inch)	About 53 (2.086)
Degree of protection	Front: IP65 / NEMA Enclosure Type 1 (indoor use only) Rear: IP20
Total weight	About 4000 g

Approvals

CE approval	CE
UL approval	UL / cUL

6.7 18.5" Display (PCAP)

Touch Screen

Type	Projected capacitive
Operation	With the finger

Display

Size (diagonal) in cm (inch)	47 (18.5)
Type	TFT (color)
Resolution (pixels)	1366 x 768
Colors	16.77 million
Viewing angle (left / right / up / down) in °	85 / 85 / 80 / 80
Half-life backlighting	50,000 h
Brightness in cd/m ²	240
Display area (H x W) in mm (Inch)	230 x 410 (9.055 x 16.141)

Environmental Conditions

Temperature during operation	0 °C to 50 °C (32 °F to 122 °F) - (with order key option P29 / P31)
Temperature during storage, transport	- 20 °C to + 60 °C (- 4 °F to 140 °F)
Relative air humidity for operation and storage	Front: 5 % to 95 %, no condensation Rear: 20 % to 85 %, no condensation
Application area	Degree of pollution 2, overvoltage category II No direct solar radiation

Electrical Data

Supply voltage	24 V DC (SELV / Limited energy circuit in accordance with EN 61010-1 / IEC 61010-1 or Class 2 in accordance with UL 1310 or Limited Power Source (LPS) in accordance with EN 60950-1 / IEC 60950-1)
Residual ripple	10 % maximum
Minimum voltage	18 V
Maximum voltage	30 V
Power consumption, typical at 24 V (standard / field bus)	1.2 A
Inrush current	< 10 x nominal current
Connected load (standard / field bus)	28.8 W
Fuse	Electronic fuse, self-resetting
Protection against polarity reversal	Integrated

Front Panel and Enclosure

Enclosure	Steel sheet, galvanized
Front panel material	Aluminium, brushed, anodized natural finish
Front panel (H x W x D) in mm (Inch)	329 x 485 x 8 (12.952 x 19.094 x 0.314)
Seal	Flat gasket on the rear
Mounting cutout (H x W) in mm (Inch)	311 x 475 (12.244 x 18.7)
Mounting brackets	12
Mounting depth in mm (Inch) - (standard / field bus)	About 53 (2.086)
Degree of protection	Front: IP65 / NEMA Enclosure Type 1 (indoor use only) Rear: IP20
Total weight	About 5500 g

Approvals

CE approval	CE
UL approval	UL / cUL

A 1 Index

C

Cable	
Ethernet.....	38
USB.....	39
Connecting.....	31

D

Diagnostics	
Ethernet.....	39
Dimensions	
Cutout.....	19
Front panel	13
Display	35

F

Front panel dimensions	
10.1" Display (PCAP)	15
12.1" Display (PCAP)	16
15.6" Display (PCAP)	17
18.5" Display (PCAP)	18
7" Display (PCAP)	14
7" Display (resistive).....	13
Fuse	41

I

Identification.....	33
Intended use	8
Interface	
Ethernet.....	38
USB.....	39

M

Maintenance	41
Memory card.....	40
Mounting	12
Mounting cutout	
10.1" Display (PCAP)	21
12.1" Display (PCAP)	22
15.6" Display (PCAP)	23
18.5" Display (PCAP)	24
7" Display (PCAP)	20
7" Display (resistive).....	19

Mounting depth

10.1" Display (PCAP)	27
12.1" Display (PCAP)	28
15.6" Display (PCAP)	29
18.5" Display (PCAP)	30
7" Display (PCAP)	26
7" Display (resistive).....	25

N

Nameplate	33
-----------------	----

P

Pin assignment	
Ethernet.....	38

R

Rear view	
Ethernet.....	37

S

Safety notes	7
Servicing	41
Side view	
10.1" Display (PCAP)	27
12.1" Display (PCAP)	28
15.6" Display (PCAP)	29
18.5" Display (PCAP)	30
7" Display (PCAP)	26
7" Display (resistive).....	25
Standards	44
Supply Voltage.....	31
Switching on	33
Symbols	7

T

Target group	9
Technical data	43
10.1" Display (PCAP)	49
12.1" Display (PCAP)	51
15,6" Display (PCAP)	53
18.5" Display (PCAP)	55
7" Display (PCAP)	47
7" Display (resistive).....	45

WP 4000

Touchscreen 35

U

Unpacking 11

V

Version 33